



Harlequin Liberty Switch® is a revolutionary multi-use floor which transforms between a sprung performance floor and a rigid theatrical floor at the touch of a button. It is a modular floor system consisting of a base unit housing the control and drive mechanisms topped with a Harlequin Liberty® LatchLoc sprung floor.

Application



Harlequin Liberty Switch is designed for venues who regularly put on both dance and theatrical performances and so require both a high-quality sprung dance floor and a rigid theatre floor in the same performance or rehearsal space.

Specification Guide

Testing Standards	BS EN 1990:2002 BS EN 1991-1-1:2002 BS EN 1995-1-1:2004 BS EN 14904:2006 (Sprung Dance Mode)
Load Rating (Standard 3 track system)	Rigid Theatre Mode
Point Load	>809 lbs
Distributed Load	>626 lbs/ft ²
Performance	Sprung Dance Mode
Point Load	>809 lbs
Distributed Load	>208 lbs/ft ²
Shock Absorption	67%
Vertical Deformation	0.16"
Area Deflection	12.8%
Weight	
Total Panel weight (Standard 3 track system)	176 lbs/5.5 ft ²
Size	
Panel Length	96"
Panel Width	48"
Minimum Floor Height	3 5/8" nominal (excluding performance surface)
Fire Rating	Bfls 1 to EN 13501
Impact Generated sound Level within Room (Δ Lw)	104.20DB
Thermal Resistance - R Value	1.52 m ² K/W
Thermal Insulation - U Value	0.658W/m ² K
Category of Use	A4
VOC Emissions	<0.10 mg/m ³
Installation	Installed by Harlequin's technical team
Patents	UK: GB2592382 USA: US 11,649,646 B2 Australia: 2021227418 International: WO2021/170970
Awards	LDI - Best Debating Product, Staging and Rigging Award 2022 ABTT - Engineering Product of the Year 2023 JTSE - Innovation Award 2023 SHOWTECH - DTHG Technology Product Award 2023





Yuen Long - TAIT

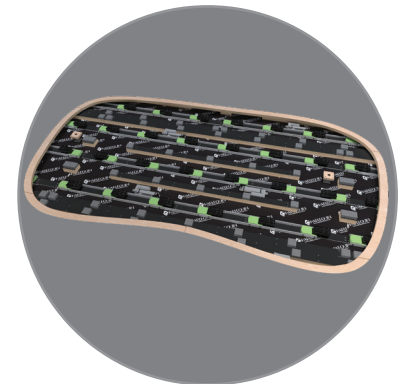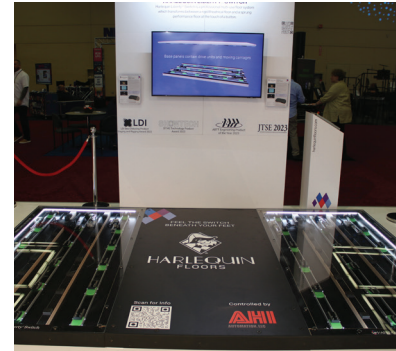

Features and Benefits

- Transforms from sprung to rigid mode in less than 30 seconds (subject to size of installation).
- Simple one-touch operation using a hard-wired master control unit.
- Can be integrated with most existing stage control or building management systems.
- Allows for maximum use of space.
- No storage costs.
- Can be 'zoned' to create sprung or rigid areas within the floor if required.
- Requires no power to stay in selected mode.
- Modular system can be modified to meet any structural design requirements, ideal for studios, rehearsal rooms and stages.
- 3-track system as standard. Custom systems available for various load and space requirements.
- May be configured to incorporate features such as traps, lifts and revolves as required.
- Harlequin Liberty Switch is more sustainable than the traditional alternative of using a portable sprung floor or ballet wagon. Having one multi-purpose floor instead of two separate floors uses less resources. The floor does not need to be stored, moved, installed, or uninstalled for each performance, reducing the manpower required and energy consumed.
- Harlequin Liberty Switch uses no power to stay in the selected mode, minimizing energy consumption.
- All timber used in the manufacture of Harlequin Liberty Switch is responsibly sourced from sustainable well-managed forests that are FSC certified.

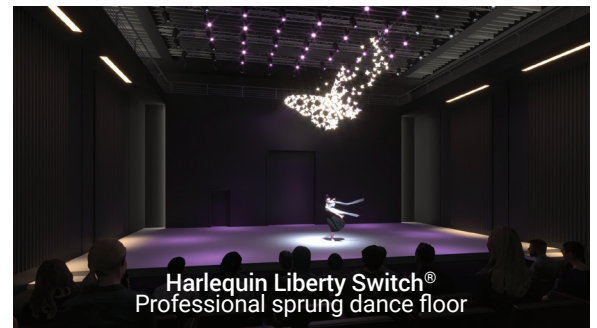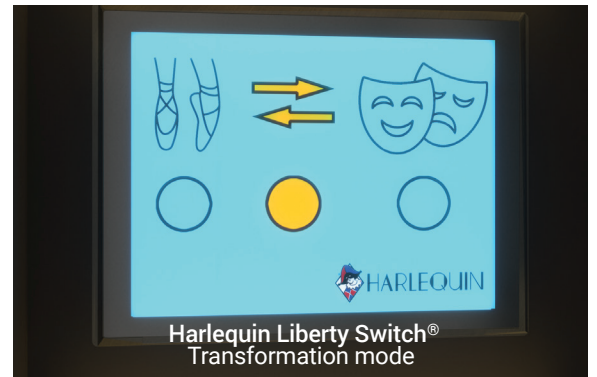


American Harlequin Corporation

1531 Glen Avenue
Moorestown, NJ 08057

(800) 642 6440
contact@harlequinfloors.com
harlequinfloors.com

The Company reserves the right to make any variation in design or construction of the material described.
© Harlequin Floor 06/2024

PHILADELPHIA
LOS ANGELES
LAS VEGAS
LONDON
PARIS
BERLIN
LUXEMBOURG
MADRID
SYDNEY
HONG KONG
TOKYO



HARLEQUIN
FLOORS

CALL 800-642-6440 or VISIT www.harlequinfloors.com

For samples or information on Harlequin Floors complete range of vinyl and sprung floors.